

# 5MP WDR Starlight Mini Fixed Bullet Network Camera

IPC2125SR3-ADUPF40 (60)



## Key Features

### Optics

- Starlight illumination
- Day/night functionality
- Smart IR , up to 30 m (98 ft) IR distance
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 2D/3D DNR (Digital Noise Reduction)

### Compression

- Ultra 265,H.265, H.264, MJPEG
- Embedded smart algorithm
- Triple streams
- 9:16 corridor format

### Network

- ONVIF Conformance

## Structure


- Wide temperature range: -35°C to 60°C (-31°F to 140°F)
- Wide voltage range of  $\pm 25\%$
- IP67

## Specifications

|                            | IPC2125SR3-ADUPF40  | IPC2125SR3-ADUPF60 |
|----------------------------|---|--------------------|
| <b>Camera</b>              |   |                    |
| Sensor                     | 1/2.7", progressive scan, 5.0 megapixel, CMOS   |                    |
| Lens                       | 4.0mm@ F1.6   | 6.0mm@ F1.6        |
| Angle of View(H)           | 86.9°   | 54.05°             |
| Shutter                    | Auto/Manual, 1/6~1/100000 s   |                    |
| Minimum Illumination       | Colour: 0.005 Lux (F1.6, AGC ON)<br>0 Lux with IR on  |                    |
| Day/Night                  | IR-cut filter with auto switch (ICR)  |                    |
| Digital noise reduction    | 2D/3D DNR   |                    |
| S/N                        | >52dB   |                    |
| IR Range                   | Up to 30m (98 ft) IR range  |                    |
| Defog                      | Digital Defog   |                    |
| WDR                        | 120dB   |                    |
| <b>Video</b>               |   |                    |
| Video Compression          | Ultra 265,H.265, H.264, MJPEG   |                    |
| H.264 code profile         | Baseline profile, Main Profile, High Profile  |                    |
| Frame Rate                 | Main Stream: 5MP(2592 x 1944): Max. 20 fps, 5MP(2592 x 1944): Max. 25fps(WDR OFF), 4MP(2560 x 1440): Max. 30 fps, 3MP(2048x 1536): Max. 30 fps, 2MP(1920 x 1080): Max. 30 fps;<br>Sub Stream:2MP(1920 x 1080): Max. 30 fps;<br>Third Stream: D1(720 x 576): Max.30 fps; |                    |
| 9:16 Corridor Mode         | Supported   |                    |
| HLC                        | Supported   |                    |
| BLC                        | Supported   |                    |
| OSD                        | Up to 8 OSDs  |                    |
| Privacy Mask               | Up to 8 areas   |                    |
| ROI                        | Up to 8 areas   |                    |
| Motion Detection           | Up to 4 areas   |                    |
| <b>Smart</b>               |   |                    |
| Behavior Detection         | Intrusion, cross line, motion detection   |                    |
| Exception Detection        | Audio detection   |                    |
| Intelligent Identification | Face detection, Defocus, Scene Change   |                    |
| Statistical Analysis       | People counting   |                    |
| General Function           | Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication   |                    |

| Audio                  |   |
|------------------------|---|
| Audio Compression      | G.711   |
| Suppression            | Supported   |
| Sampling Rate          | 8 KHZ   |
| Network                |   |
| Protocols              | IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP |
| Compatible Integration | ONVIF(Profile S), API   |
| Interface              |   |
| Built-in Mic           | Supported   |
| Network                | 1 RJ45 10M/100M Base-TX Ethernet  |
| General                |   |
| Power                  | 12 V DC±25%, PoE (IEEE802.3 af)   |
|                        | Power consumption: Max 6.4 W  |
| Dimensions (L × W × H) | 157.3 ×62.4 ×63mm (6.2" × 2.5" × 2.5")  |
| Weight                 | 0.45 kg (0.99 lb)   |
| Working Environment    | -35°C ~ +60°C (-31°F ~ 140°F), Humidity :10%~95% RH(non-condensing)   |
| Ingress Protection     | IP67  |
| Reset Button           | Supported   |

## Dimensions

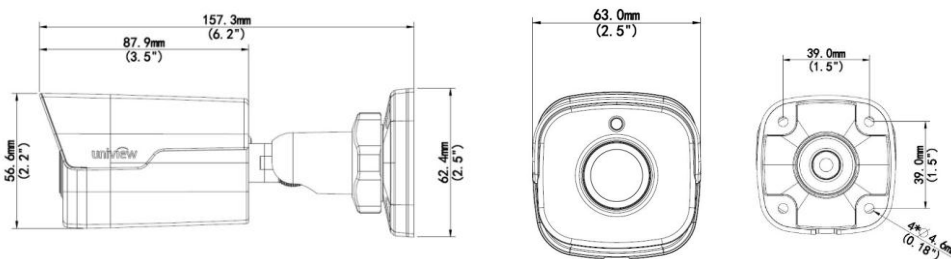

## Accessories

| Installation mode | Accessories | Description  |
|-------------------|-------------|--|
| Wall mount        | \           | Mounting pedestal is included in the Product package |
| Ceiling mount     | \           | Mounting pedestal is included in the Product package |

### Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2018 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.