

# 1.3MP Network IR Fixed Dome Camera

## IPC3611ER3 Series



## Key Features

### Optics

- Day/night functionality
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- Up to 30 m (98 ft) IR distance
- 3D noise reduction

### Compression

- H.264/MJPEG
- Triple streams

### Network

- ONVIF Conformance

### Structure

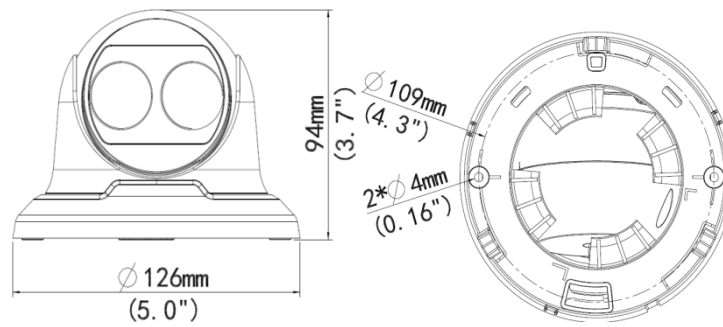
- Support PoE power supply(optional)
- Wide temperature range: -35°C to 60°C (-31°F to 140°F)
- Wide voltage range of  $\pm 25\%$
- 4 KV surge protection designed for network interface

- IP66

## Specifications

	IPC3611ER3-F28(36)(60)
<b>Camera</b>	
Sensor	1/3", 1.3 megapixel, progressive scan, CMOS
Lens	2.8mm@F1.8(3.6mm, 6mm optional); Angle of view(H): 99.1° (76.7° / 46.9°)
Shutter	Auto/Manual, 1/6~1/8000 s
Day/Night	IR-cut filter with auto switch (ICR)
IR	30m (98 ft) IR range
AWB(Auto white balance)	Auto/manual
Gain Control	Auto/manual
WDR	Digital
Noise Reduction	2D/3D
<b>Video</b>	
Max. Resolution	1280×960
Video Compression	H.264/MJPEG
Frame Rate	960P (1280×960): Max. 30 fps; 720P (1280×720): Max. 30 fps; D1 (720×576): Max. 25 fps
Video Streaming	Triple
OSD	Up to 8 OSDs
Motion Detection	Up to 2 areas
Privacy Mask	Up to 4 areas
<b>Network</b>	
Protocols	IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,RTP,RTSP,Qos,DNS,DDNS,NTP,FTP,UPnP,HTTP
Compatible Integration	ONVIF
<b>Interface</b>	
Network	10M/100M Base-TX Ethernet
<b>General</b>	
Power	12 V DC
	Power consumption: 3.5 W (5.5W with IR on)
Dimensions (∅ x H)	∅126 x 94 mm (∅5.0" x 3.7")
Weight	0.33 kg (0.73 lb)
Operating Conditions	-35°C ~ +60°C (-31°F ~ 140°F), Humidity ≤ 90% RH(non-condensing)
Ingress Protection	IP66

## Dimensions

**Zhejiang Uniview Technologies Co., Ltd.**

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2015 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.