

# 1.3MP Network IR Bullet Camera

## IPC2211SR3 Series



## Key Features

### Optics

- Day/night functionality
- Optical glass window with higher light transmittance
- IR anti-reflection window to increase the infrared transmittance
- 3D DNR (Digital Noise Reduction)

### Compression

- H.264/MJPEG
- Triple streams

### Network

- ONVIF Conformance


### Structure

- Support PoE power supply(optional)
- Wide temperature range: -35°C to 60°C (-31°F to 140°F)
- Wide voltage range of  $\pm 25\%$
- 4 KV surge protection designed for network interface
- IP66

## Specifications

	IPC2211SR3-F36 (60)(120)	IPC2211SR3-PF120
<b>Camera</b>		
Sensor	1/3", 1.3 Megapixel, progressive scan, CMOS	
Lens	3.6mm@F1.8(6mm, 12mm optional); Angle of view(H): 76.7° (46.9° / 24.2°)	
Shutter	Auto/Manual, 1/6~1/8000 s	
Day/Night	IR-cut filter with auto switch (ICR)	
IR	Up to 30m (98 ft) IR range	
AWB(Auto white balance)	Auto/manual	
Gain Control	Auto/manual	
WDR	Digital	
Noise Reduction	2D/3D	
<b>Video</b>		
Max. Resolution	1280×960	
Video Compression	H.264/MJPEG	
Frame Rate	960P (1280*960): Max. 30 fps; 720P (1280*720): Max. 30 fps; D1 (720*576): Max. 25 fps	
Video Streaming	Triple	
OSD	Up to 8 OSDs	
Motion Detection	Up to 2 areas	
Privacy Mask	Up to 4 areas	
<b>Network</b>		
Protocols	IPv4,IGMP,ICMP,ARP,TCP,UDP,DHCP,RTP,RTSP,Qos,DNS,DDNS,NTP,FTP,UPnP,HTTP	
Compatible Integration	ONVIF	
<b>Interface</b>		
Network	10M/100M Base-TX Ethernet	
<b>General</b>		
Power	12 V DC	12 V DC, or PoE (IEEE802.3 af)
	3.5 W (5.5W with IR on )	
Material	Plastics	
Dimensions (L × W × H)	146 × 82.4 × 71.7 mm (5.7" × 3.2" × 2.8")	
Weight	0.26 kg (0.57 lb)	
Working Environment	-35°C ~ +60°C (-31°F ~ 140°F), Humidity ≤ 90% RH(non-condensing)	
Ingress Protection	IP66	

Dimensions

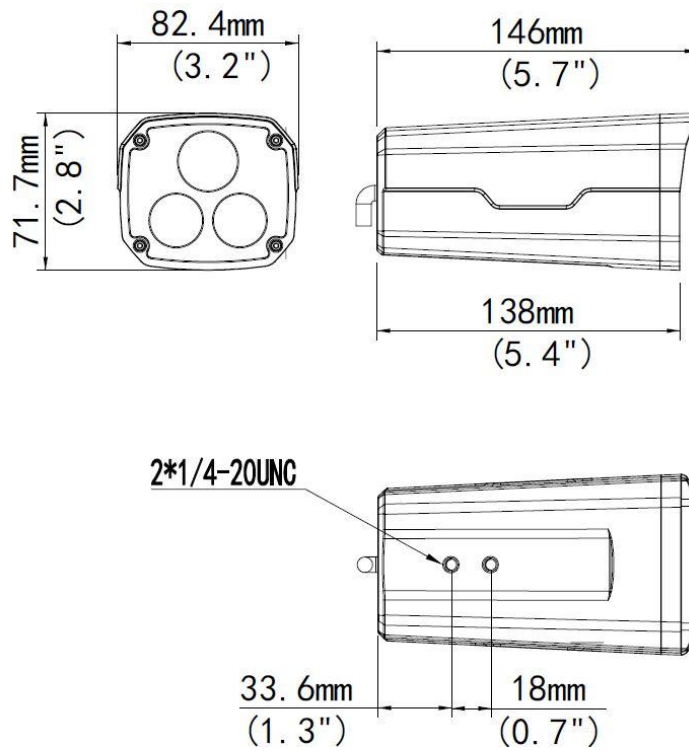

**Zhejiang Uniview Technologies Co., Ltd.**

South Tower, Building 10, Wanlun Science Park, 88 Jiangling Road, Hangzhou, P.R.China 310051

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2015 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.